


Ground Rod Clamps

Ground Rod Clamp

Part No.	Ground Rod Size	Conductor Range (AWG)	Box Qty.	Approx. Box Wt. (lbs.)
GRC-1/2	1/2"	10 Sol. - #2 Str.	10	2
GRC-5/8	5/8"	10 Sol. - #2 Str.	10	2
GRC-3/4	3/4"	10 Sol. - #2 Str.	10	2
GRC-1.00	1"	8 Sol. - 4/0	10	6


- Bronze cap screw secures the cable to the ground electrode.
- Commonly called acorn or tear drop clamp.

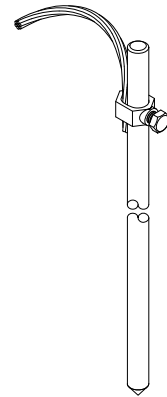

Universal Ground Rod Clamp - GRC-3/4"

Part No.	Ground Rod Size	Conductor Range (AWG)		
GRC-3/4	5/8"	7/16" 6X25 IWRC	XIP WIRE	ROPE GALVANIZED
		1/0 - 8 Sol.		

- Light duty ground rod clamp for securing cable to ground rod.
- Eliminates the need to inventory assorted different size clamps.
- Manufactured from corrosion resistant silicon bronze.
- UL and CSA listed for Direct Burial.

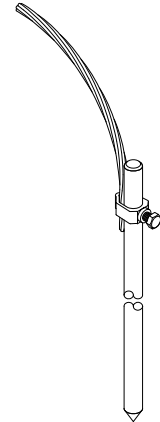

APPLICATION NOTES:

- Ground Rod Clamps for lightning protection systems require 1-1/2" of surface contact between conductor and ground rod.

Specifications :

Material Silicon Bronze
 Ground Rod Diameter, Nominal 1/2" – 5/8"
 Ground Rod Diameter, Actual (Ø) 0.50" – 0.56"
 Conductor Size #10 Solid - #2 Stranded
 6 mm² Solid - 25 mm² Stranded
 Wrench Size 1/2"
 Complies With IEC® EN 62561-1
 Torque (TQ) 150 in lb